


Roller 402 WT

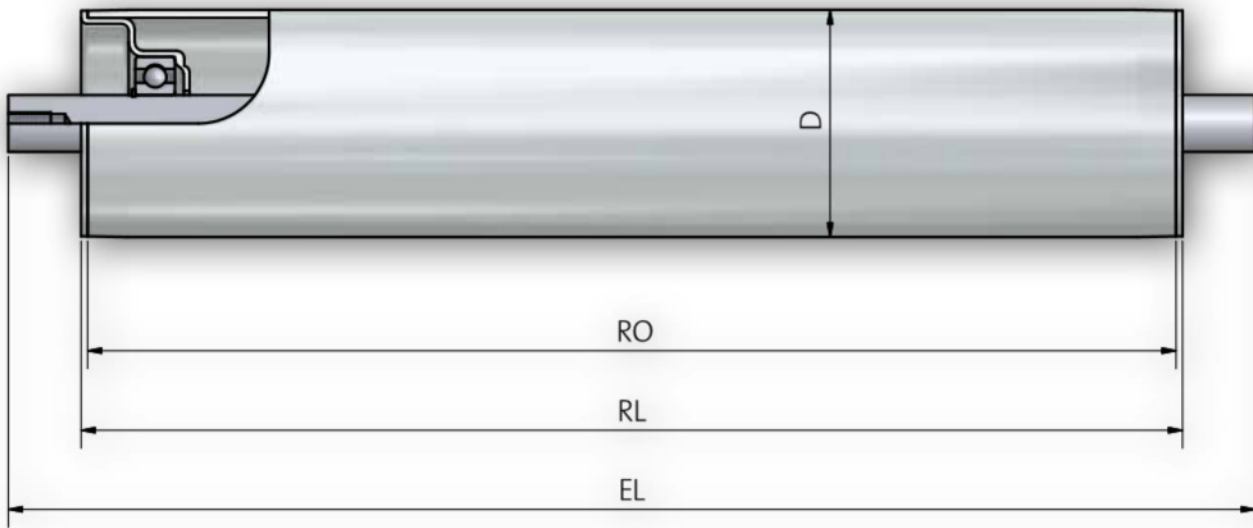

Shaft dimensions

Order Specification		A...AGM...	A...JGM...	A...SW...
Shaft- \varnothing	EL=			
15	RL+	10	10	10
17	RL+	10	10	10
20	RL+	10	10	10

Tube- and Shaft Combination

Tube dia.	A15	A17	A20
50 x 1,5	x		
50 x 2	x		
60 x 2	x	x	
60 x 3	x	x	
63,5 x 2,9		x	x
80 x 2			x
80 x 3			x
88,9 x 2,9			x

Roller 402 WT

Bearing Type	Steel housing with Precision Ball Bearing
Type of Bearing	Ball Bearings (Series 6202, 6204) DIN 625 available in 2RS, ZZ
Load Capacity/Roller	2.400N (depending upon the load limit of tube and shaft)
Max. Speed	1,2 m/s
Range of Temperature Celcius	-5 to +80 C
Optional	
Note	With special greasing even for use in Deep Freeze Areas (-28°C).

Order Example

Type	402 WT RS - 80x2 STI A20 IGM 12x20 EL=950mm
Bearing Type	RS
Ball bearing sealing	ZZ
Tube-Ø and wall thickness	80x2
Tube quality	STI
Shaft-Ø	A20
Shaft Ends	IGM
Installation length	12x20 EL=950mm