


# Roller 200

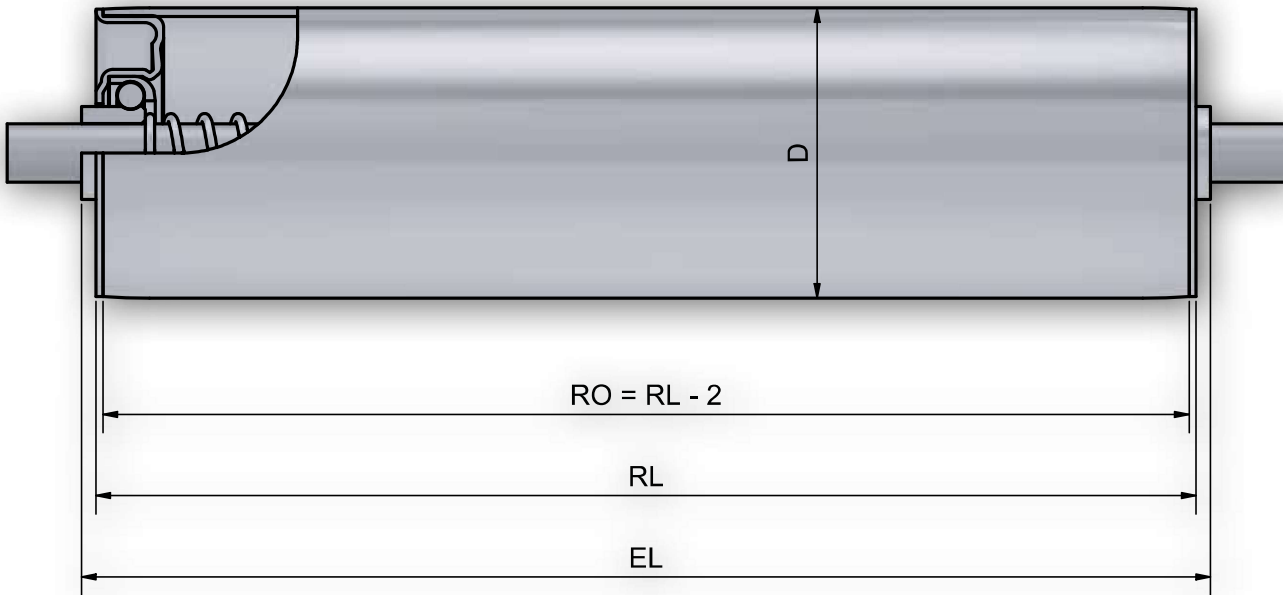

## Shaft dimensions

Order Specification		A...M...	A...IGM...	A...glatt	A...SW...	A...FA...
Shaft-Ø	EL=					
6	RL+	16		6		6
8	RL+	19		6		6
10	RL+	18	6	6	6	6
S 11	RL+			6		6
12	RL+	20	6	6	6	6

## Tube- and Shaft Combination

Tube dia.	A6	A8	A10	A S11	A 12
30 x 1,5	x	x	x		
40 x 1,5		x	x	x	x
50 x 1,5	x	x	x	x	x
50 x 2		x	x	x	x
60 x 2		x	x	x	x
80 x 2			x	x	x

# Roller 200

## Bearing Type

Type of Bearing  
 Load Capacity/Roller  
 Max. Speed  
 Range of Temperature  
 Celcius  
 Optional  
 Note

## Steel housing with Ball Row

Ball Row  
 1.600N (depending upon the load limit of tube and shaft)  
 See fold-out cover  
 0,6 m/s  
 -5 to +80 C  
 With special greasing even for use in Deep Freeze Areas (-28°C)  
 Gravity Roller - not for use as driven roller.

## Order Example

