


# Roller 260 / 261

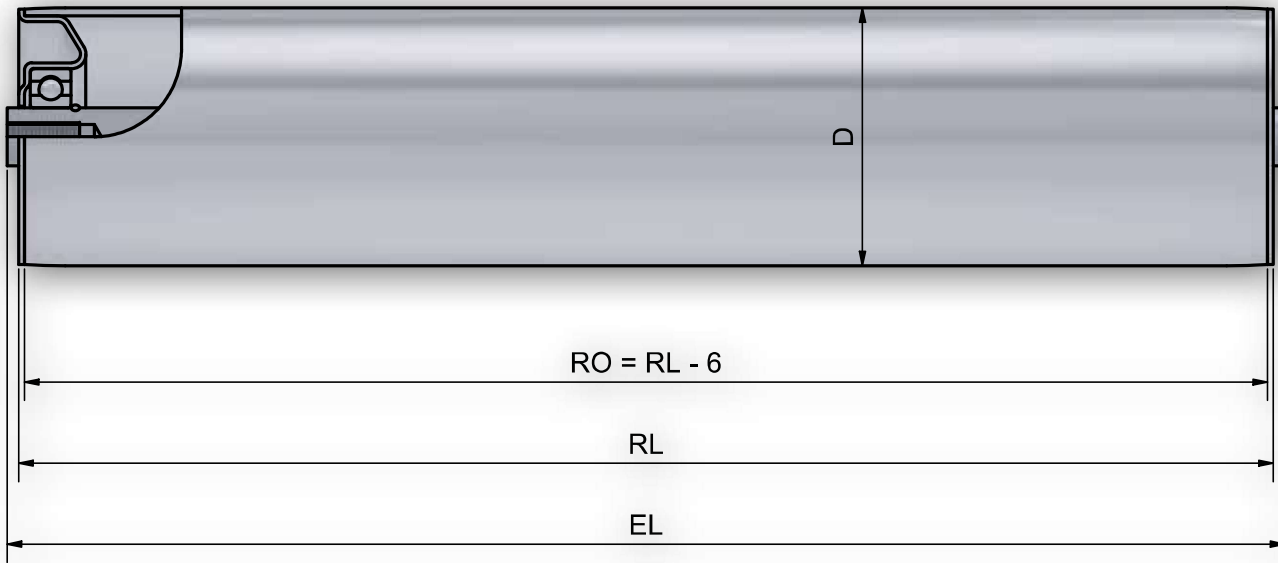

## Shaft dimensions

Order Specification		A...M...	A...IGM...	A...SW...	A... AGM...
Shaft-Ø	EL=				
17	RL+	22	6	6	6
20	RL+	24	6	6	6
25	RL+		6	6	6

## Tube- and Shaft Combination

Tube dia.	A17	A20	A25
63,5 x 2,9		x	
70 x 2,9	x	x	
80 x 2	x	x	x
80 x 3	x	x	x
88,9 x 2,9	x	x	x
108 x 3,25		x	x

# Roller 260 / 261

## Bearing Type

Type of Bearing

Load Capacity/Roller

Max. Speed

Range of Temperature  
Celcius

Optional

Note

## Steel housing with Precision Ball Bearing

Ball Bearings (Series 6004,6005,6204) DIN 625 available in 2RS, ZZ

5.000N (depending upon the load limit of tube and shaft)  
See fold-out cover

1,2 m/s

-5 to +80 C

Type 261 with additional sealing

For use as driven roller.

Tube dia. 63,5 mm only available with shaft dia. D=20 mm.

With special greasing even for use in Deep Freeze Areas (-28°C).

## Order Example

<b>Type</b>	<b>260I ZZ - 88,9x2,9 STI A20 IGM 12x20 EL=950mm</b>
Bearing Type.....	
Ball bearing sealing .....	
Tube-Ø and wall thickness .....	
Tube quality .....	
Shaft-Ø .....	
Shaft Ends .....	
Installation length .....	