


Roller 290

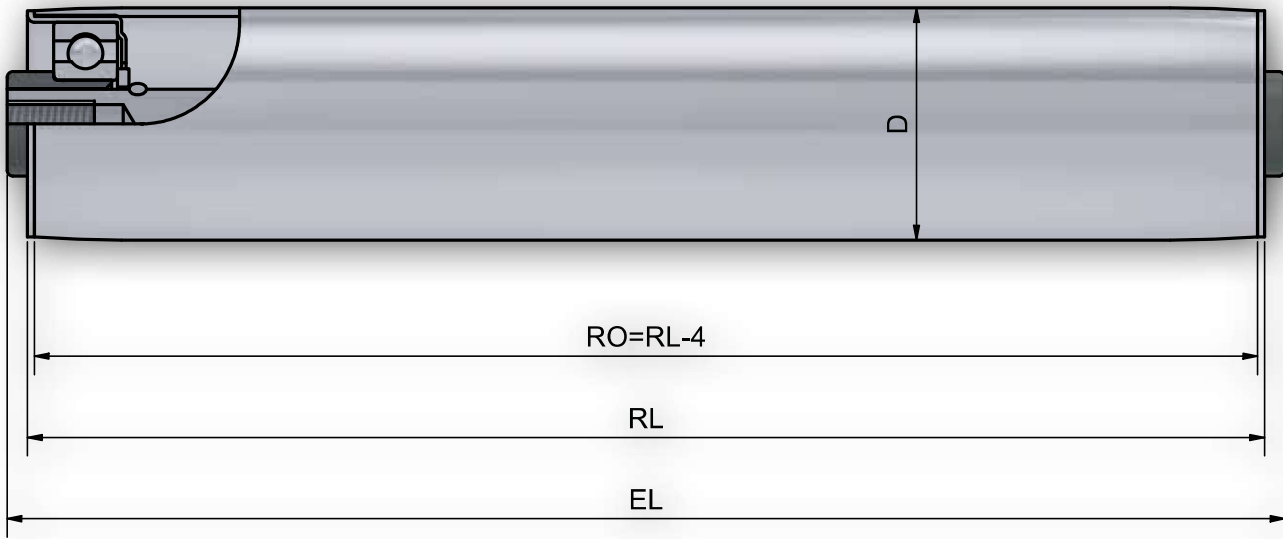

Shaft dimensions

Order Specification		A...M...	A...AGM...	A...IGM...	A...glatt	A...SW...	A...FA...
Shaft-Ø	EL=						
8	RL+				10		10
10	RL+	22	10	10	10	10	10
S 11	RL+				10		10
12	RL+	24	10	10	10	10	10
14	RL+	26	10	10	10	10	10
15	RL+		10	10		10	

Tube- and Shaft Combination

Tube dia.	A8	A10	A S11	A12	A14	A15
40 x 1,5	x	x	x	x	x	x

Roller 290

Bearing Type

Steel housing with Precision Ball Bearing

Type of Bearing

Ball Bearings (Series 6202) DIN 625 available in 2RS, ZZ Standard Series 6202ZZ - plastic distance bushings to get the shaft diameters

Load Capacity/Roller

1.200N (depending upon the load limit of tube and shaft)
See fold-out cover

Max. Speed

1,2 m/s

Range of Temperature
Celcius

-5 to +60 C

Optional

Note

For use as driven roller.
With special greasing even for use in Deep Freeze Areas (-28°C).

Order Example

Type	290 ZZ - 40x1,5 STI A12 IGM 8x15 EL=500mm
Bearing Type.....	
Ball bearing sealing.....	
Tube-Ø and wall thickness	
Tube quality.....	
Shaft-Ø.....	
Shaft Ends.....	
Installation length	