


Roller 400

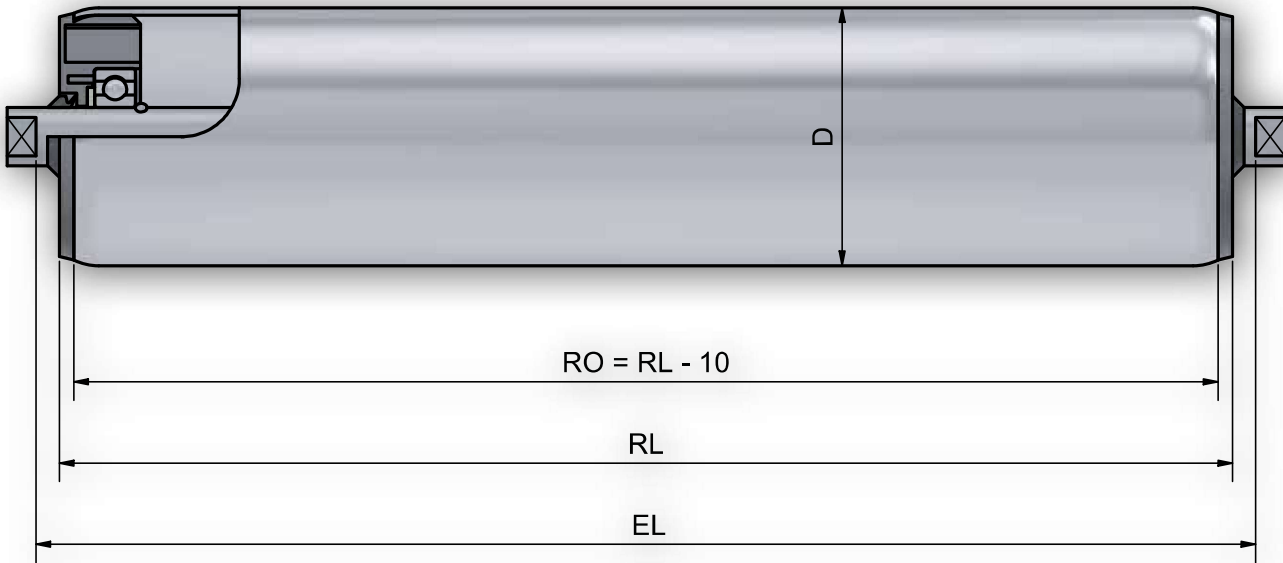

Shaft dimensions

Order Specification	A...M...	A...AGM...	A...IGM...	A...SW...
Shaft-Ø	24	6	6	6
EL=	24	6	6	6

Tube- and Shaft Combination

Tube dia.	A20
50 x 2	x
60 x 2	x
63,5 x 2,9	x
80 x 2	x
80 x 3	x
88,9 x 2,9	x
90 x 7	x
108 x 3,25	x
133 x 3,6	x

Roller 400

Bearing Type

Thermoplastic synthetic material - Bearing Site

Type of Bearing	Ball Bearing (Series 6004, 6005, 6204, 6205) DIN 625 available in 2RS, ZZ - additional shelter with Felt Ring and V-Ring
Load Capacity/Roller	3.600N (depending upon the load limit of tube and shaft) See fold-out cover
Max. Speed	1,2 m/s
Range of Temperature Celcius	-5 to +60 C
Optional	
Note	For use as Belt Conveyor Roller.

Order Example

Type	400 RS - 88,9x2,9 STI A20 SW 15x10 EL=950mm
Bearing Type.....	
Ball bearing sealing	
Tube-Ø and wall thickness	
Tube quality.....	
Shaft-Ø.....	
Shaft Ends.....	
Installation length	