


Roller 402 ST

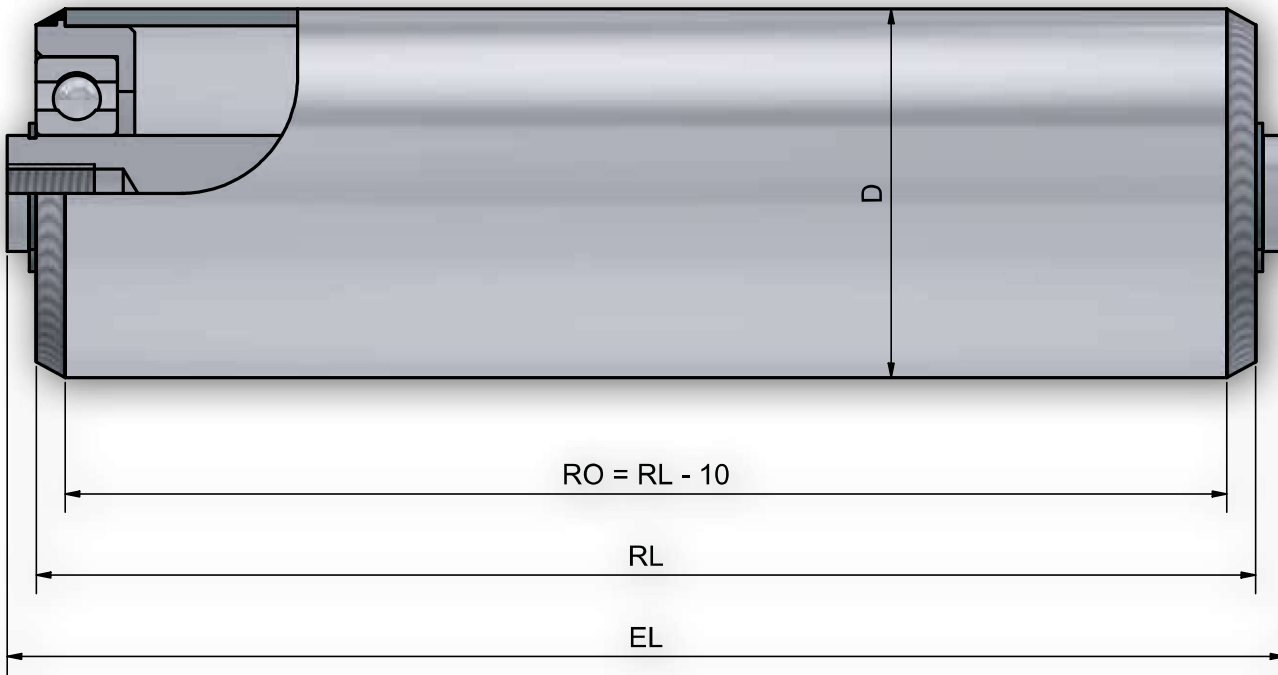

Shaft dimensions

Order Specification		A...M...	A...AGM...	A...IGM...	A...SW...
Shaft-Ø	EL=				
20	RL+	26*	10	10	10
25	RL+		10	10	10

* With circlip + nut A 20 M20: EL=RL+28 mm

Tube- and Shaft Combination

Tube dia.	A20	A25
63,5 x 2,9	x	x
80 x 3	x	x
88,9 x 2,9	x	x
108 x 3,25	x	x
133 x 3,6	x	x

Roller 402 ST

Bearing Type

Type of Bearing

Load Capacity/Roller

Max. Speed

Range of Temperature
Celcius

Optional

Note

Steel housing with Precision Ball Bearing

Ball Bearings (Series 6004, 6005, 6204) DIN 625 available 2RS, ZZ
(depending upon the load limit of tube and shaft)
See fold-out cover

1,2 m/s

-5 to +80 C

402 N stainless steel 1.4305

With special greasing even for use in Deep Freeze Areas (-28°C).
Bearing housing welded to the tube.

Order Example

Type	402 ST RS - 88,9x2,9 ST A20 IGM 12x20 EL=950mm
Bearing Type.....	
Ball bearing sealing	
Tube-Ø and wall thickness	
Tube quality	
Shaft-Ø	
Shaft Ends	
Installation length	