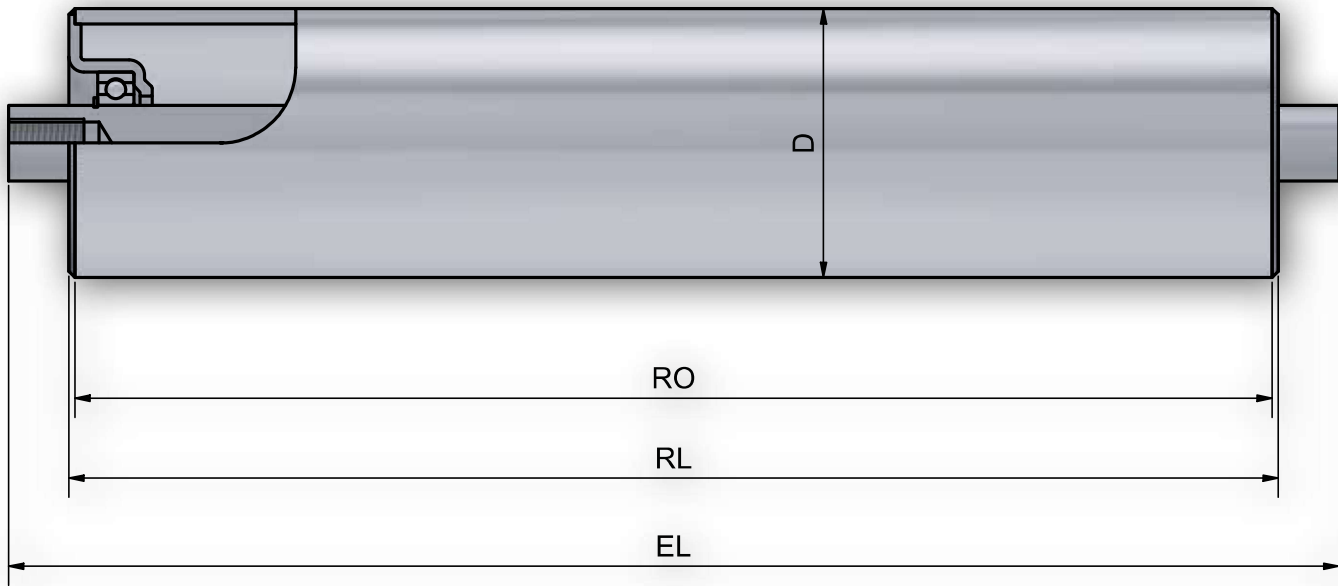




# Roller 402 WS



## Shaft dimensions

Order Specification		A...IGM...	A...SW...
Shaft-Ø	EL=		
20	RL+	10	10
25	RL+	10	10

## Tube- and Shaft Combination

Tube dia.	A20	A25
63,5 x 2,9	x	x
80 x 3	x	x
88,9 x 2,9	x	x
108 x 3,25	x	x
133 x 3,6	x	x

# Roller 402 WS

## Bearing Type

Type of Bearing

Load Capacity/Roller

Max. Speed

Range of Temperature  
Celcius

Optional

Note

## Steel housing with Precision Ball Bearing

Ball Bearings (Series 6005, 6204) DIN 625 available in 2RS, ZZ

6.000N (depending upon the load limit of tube and shaft)  
See fold-out cover

1,2 m/s

-5 to +80 C

With special greasing even for use in Deep Freeze Areas (-28°C).  
Bearing housing welded to the tube.

## Order Example

<b>Type</b>	<b>402 WS RS - 88,9x2,9 ST A20 IGM 12x20 EL=950mm</b>
Bearing Type.....	
Ball bearing sealing .....	
Tube-Ø and wall thickness .....	
Tube quality.....	
Shaft-Ø.....	
Shaft Ends.....	
Installation length .....	