


# Roller 506R

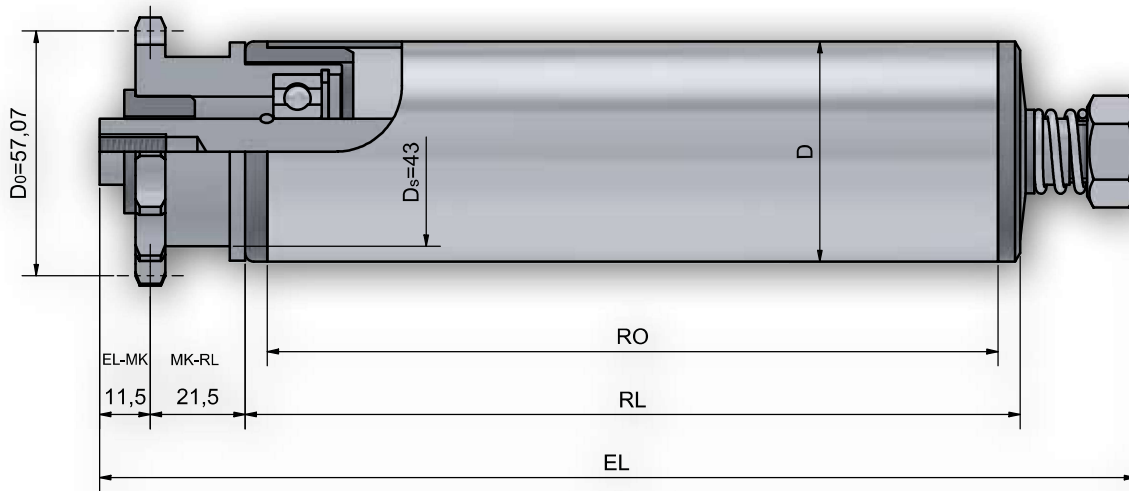

## Shaft dimensions

Order Specification		A...IGM...
Shaft-Ø	EL=	
15	RL+	58

## Range of counter bearings for tube- and shaft combinations

Tube dia.	A15
50 x 1,5	301 / 302 / 402WT
50 x 2	301
50 x 2,8 KB/ KGH	301
50 x 3	301
60,3 x 1,65	301
60 x 2	301 / 302 / 402WT
60 x 3	301 / 402WT
63 x 3 KB/KGH	301
63,5 x 2,9	301 / 402WT
80 x 2	301 / 402WT

<b>Optional</b>	Coatings Page 10
-----------------	------------------

# Roller 506R

<b>Drive Element</b>	<b>Steel - Single Sprocket 1/2" x 5/16" z=14 (Bolt Tooth Form)</b>
Bearing Type	Ball Bearing (Series 6202) DIN 625 available in 2RS, ZZ Standard Series 6202 ZZ
Load Capacity/Roller	1.000N (depending upon the load limit of tube and shaft)
Max. Speed	0,3 m/s
Range of Temperature Celcius	-5 to +40 C
Type of Drive	Accumulation drive with a pressure of 5% of the loaded material weight (depending on adjustment).
Note	Accumulation pressure to be adjusted manually.

## Order Example

<b>Type</b>	<b>506R ZZ / 301 ZZ - 50x1,5 STI A14 IGM 8x15 EL=700mm</b>
Type Drive.....	.....
Ball bearing sealing.....	.....
Type of counter bearing.....	.....
Ball bearing sealing.....	.....
Tube-Ø and wall thickness.....	.....
Tube quality.....	.....
Shaft-Ø.....	.....
Shaft Ends.....	.....
Installation length.....	.....