


Conveyor Roller 600

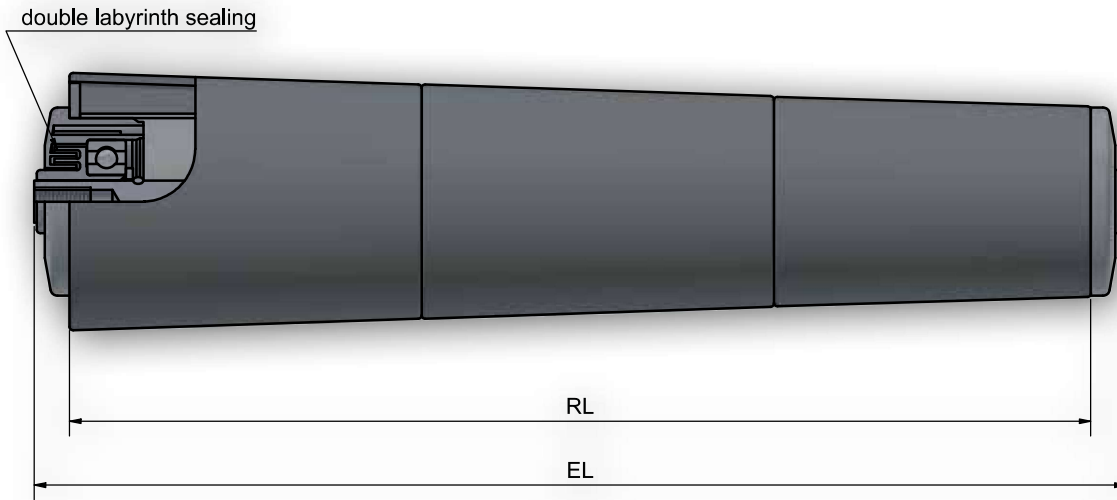

Shaft dimensions

Order Specification		A...M...	A...IGM...
Shaft-Ø	EL=		
10	RL+	32	20
12	RL+	34	20
14	RL+	36	20

Range of counter bearings for tube- and shaft combinations

Tube dia.	A10	A12	A14
50	300 / 302	300 / 302	300 / 302

Conveyor Roller 600

Bearing Type

Thermoplastic syntethic material - Steel housing with Precision Ball Bearing

Type of Bearing	Ball Bearings (Series 6202) DIN 625 available in 2RS, ZZ Standard Series 6202 ZZ
Load Capacity/Roller	400N (depending upon the load limit of tube and shaft)
Max. Speed	0,5 m/s
Range of Temperature Celsius	-5 to +40 C
Note	For use as driven roller. Conical elements also available as antistatic version.

Order Example

Type	600 / 300 ZZ - 50x1,5 STI A14 IGM 10x15 EL=557mm
Type Drive.....
Bearing.....
Ball bearing sealing.....
Tube-Ø and wall thickness.....
Tube quality.....
Shaft-Ø.....
Shaft ending.....
Installation length.....