


# Roller 60

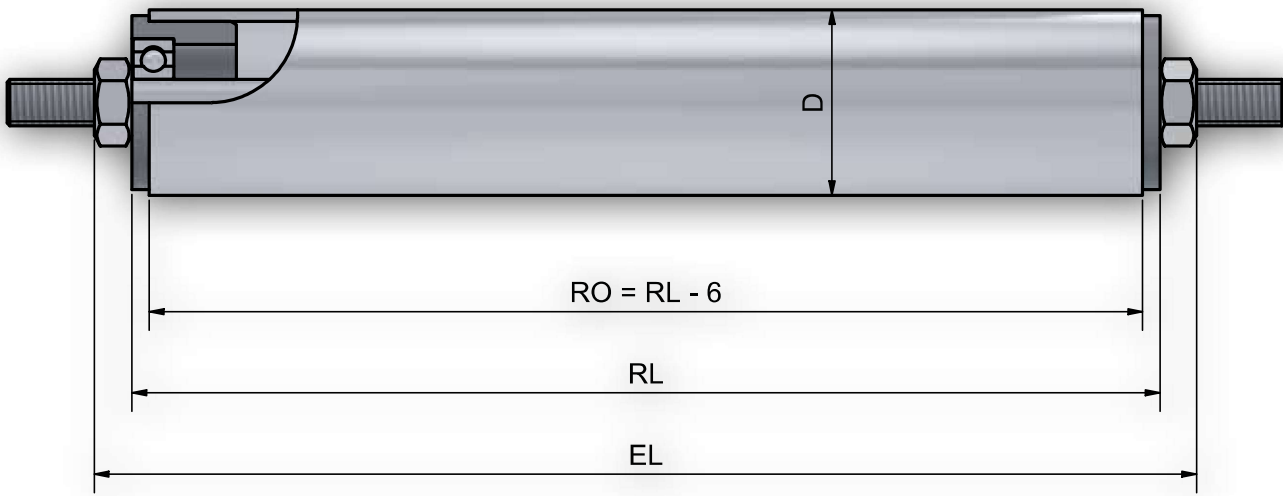

## Shaft dimensions

Order Specification		A...M...	A...IGM...
Shaft-Ø	EL=		
8	RL+	13	10
10	RL+	12	10

## Tube- and Shaft Combination

Tube dia.	A8	A10	A12	A14
30 x 1	x	x		
30 x 1,8	x			
32 x 2	x	x		
40 x 1,5	x	x	x	x

# Roller 60

## Bearing Type

## Thermoplastic synthetic material - Bearing Site

Type of Bearing	Ball Bearing (Series 608,6000), 6202 re DIN 625 available in 2RS, ZZ Standard Series 608ZZ
Load Capacity/Roller	600N (depending upon the load limit of tube and shaft) See fold-out cover
Max. Speed	1,5 m/s
Range of Temperature Celcius	-5 to +40 C
Optional	
Note	Shaft with Female Thread only in combination with shaft securing (Circlip, Starlock, Washer), antistatic version (only for Steel Tube).

## Order Example

Type	60 ZZ - 30x1 STI A8 M8x15 EL=500mm
Bearing Type	.....
Ball bearing sealing	.....
Tube-Ø and wall thickness	.....
Tube quality	.....
Shaft-Ø	.....
Shaft Ends	.....
Installation length	.....