


Roller 402

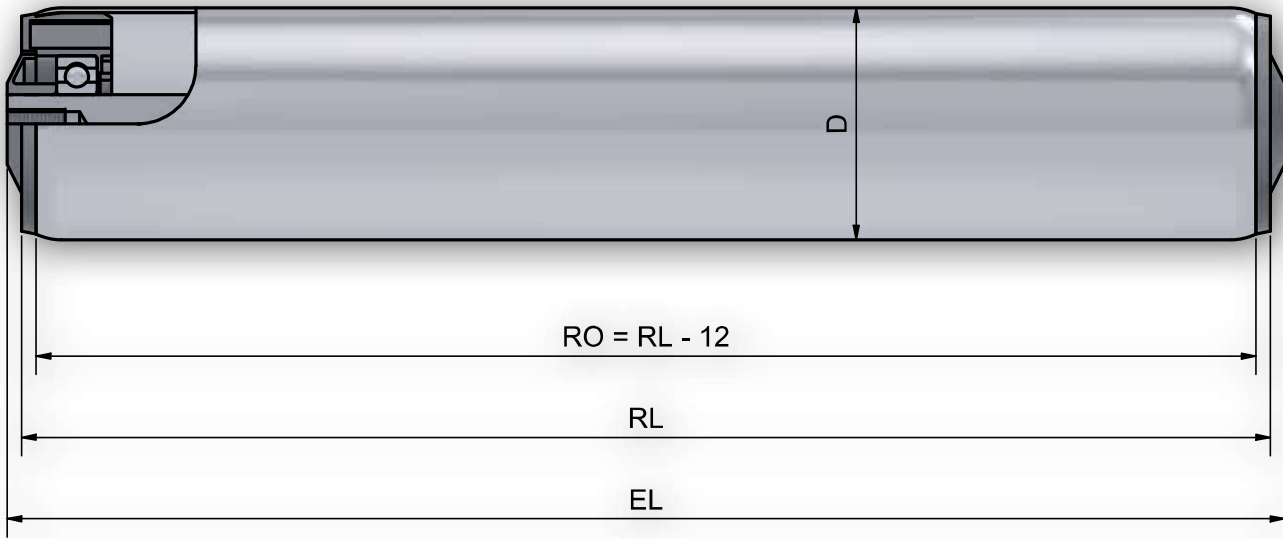

Shaft dimensions

Order Specification		A...M...	A...IGM...	A...glatt	A...SW...
Shaft-Ø	EL=				
8	RL+	23		10	
10	RL+	22	10	10	10
12	RL+	24	10	10	10
14	RL+	26	10	10	10
17	RL+	26	10	10	10
20	RL+	28	10	10	10

Tube- and Shaft Combination

Tube dia.	A8	A10	A12	A14	A17	A20
40 x 1,5	x	x	x	x		
60 x 2					x	x
63,5 x 2,9					x	x
80 x 2					x	x
88,9 x 2,9					x	x
108 x 3,25					x	x

Roller 402

Bearing Type

Type of Bearing
 Load Capacity/Roller
 Max. Speed
 Range of Temperature
 Celcius
 Optional
 Note

Thermoplastic synthetic material - Bearing Site

Ball Bearing (Series 6002, 6204, 6303) DIN 625 available 2RS, ZZ
 3.600N (depending upon the load limit of tube and shaft)
 See fold-out cover
 1,2 m/s
 -5 to +60 C
 Shaft dia. 8 mm, 10 mm, 12 mm and 14 mm only available for Tube dia. 40 mm.
 Load capacity for Tube dia. 40 mm max. 800N / Roller.
 Cover caps for tube dia. 60 or higher.

Order Example

